

KOOK 90 4.0


Certificate model name : KOOK90 4.0



Wood Insertion Cookers

CADEL

Nominal power	kW	7,5
Reduced power	kW	-
Introduced thermal power (max)	kW	9,5
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Nominal efficiency	%	82,5
Reduced efficiency	%	-
Heating volume (min-max)	m ³	180
Nominal CO at 13% O ₂	%	0,07
Reduced CO at 13% O ₂	%	-
Emissions CO (13% O ₂) (min-max)	mg/Nm ³	916
Emissions OGC (13% O ₂) (min-max)	mg/Nm ³	29
Emissions NOX (13% O ₂) (min-max)	mg/Nm ³	95
Dust content at 13% O ₂ (min-max)	mg/Nm ³	27
Boiler capacity (H ₂ O)	l	-
Hopper capacity	kg	-
Combustible		Legna
Hourly consumption (min-max)	kg/h	2,2
Autonomy (min-max)	h	-
Ignition electrical absorption (max)	W	-
Operating electrical absorption (max)	W	50
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Exhaust diameter	mm	140
Combustion air inlet diameter	mm	-
Mass of smoke (min-max)	g/sec	6,9
Exhaust fumes temperature (max)	°C	264
Net weight	kg	147,2
Gross weight	kg	162,8
Exhaust fumes	see	A
Hole combustion air inlet	see	B
Ducting outlet	see	-
Ducting capability up to	m	-

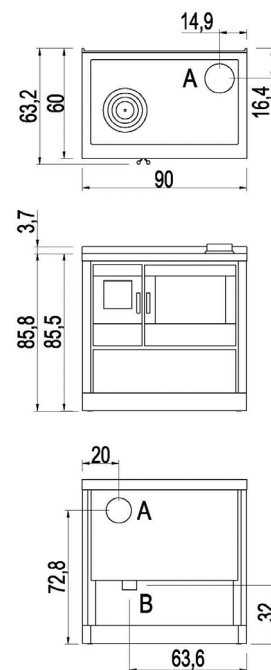

MATCH

71180050	NEUTRAL STRUCTURE	EAN 8053859010524
6915036	Stainless steel	EAN 8033123616829
6915035	Anthracite steel	EAN 8033123616812
6915051	White steel	EAN 8033123617116
6915034	Black steel	EAN 8033123616805
OPTIONAL		
5021005	Raccordo 140/150 mm	EAN 8053859014256

PLUS



Cooking



Central Top and back exhaust



Refractory stone inner with 2nd combustion air



OPTIONAL
Ventilation + light kit




View on the oven



Built - in


STOVE PACKING



L (cm)	H (cm)	P (cm)
97	102,1	79


VOLUME (m ³)
0,78

LINING PACKING



L (cm)	H (cm)	P (cm)	
steel	60	13,5	80

STOCKING



TRANSPORT

