


# ECLIPSE 11

Certificate model name : ECLIPSE 11 T1



## AIR PLUS - Ducted pellet stoves

Nominal power	kW	10,5
Reduced power	kW	3
Introduced thermal power (max)	kW	12
Nominal water useful power	kW	-
Reduced water useful power	kW	-
Seasonal energy efficiency	ηs [%]	84
Nominal efficiency	%	88
Reduced efficiency	%	90
Heating volume (min-max)	m³	84 - 294
Nominal CO at 13% O <sub>2</sub>	%	0,013
Reduced CO at 13% O <sub>2</sub>	%	0,022
Emissions CO (13% O <sub>2</sub> ) (min-max)	mg/Nm³	230 - 159
Emissions OGC (13% O <sub>2</sub> ) (min-max)	mg/Nm³	5 - 5
Emissions NOX (13% O <sub>2</sub> ) (min-max)	mg/Nm³	130 - 100
Dust content at 13% O <sub>2</sub> (min-max)	mg/Nm³	20 - 15
Boiler capacity (H <sub>2</sub> O)	l	-
Hopper capacity	kg	20
Combustible		Pellet ø6
Hourly consumption (min-max)	kg/h	0,7 - 2,5
Autonomy (min-max)	h	29 - 8
Ignition electrical absorption (max)	W	340
Operating electrical absorption (max)	W	120
Supply and frequency	V - Hz	230 - 50
Chimney flue depression	Pa	12
Mass of smoke (min-max)	g/sec	4 - 8
Exhaust fumes temperature (max)	°C	200
Net weight	kg	133
Gross weight	kg	143
Exhaust fumes (A)	Ø mm	80
Hole combustion air inlet (B)	Ø mm	50
Ducting outlet (C)	Ø mm	80
Ducting capability up to	m	6

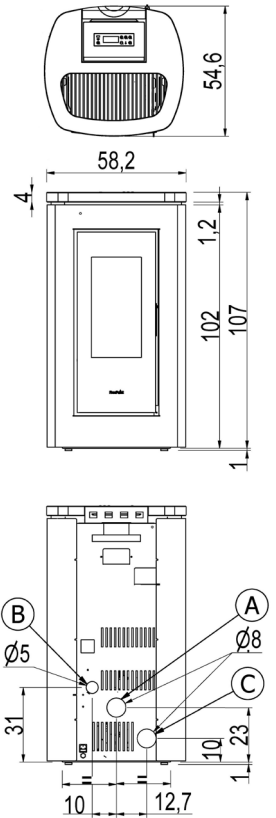

Art. 15A-B-VG 2015  
BImSchV 2015  
Regensburg  
München  
Stuttgart  
Aachen



## MATCH

7023016		Moka steel	EAN 8053859018988
7023018		Anthracite steel	EAN 8053859019008

## PLUS



AIRTIGHT sealed chamber



Integrated Wi-Fi



Easy start



Ductible with 1 independent motor



Back exhaust



Cast iron burning pot



Silent function




Connection to the room thermostat



Daily weekly programming


## STOVE PACKING



L (cm)	H (cm)	P (cm)
79	130	67


VOLUME (m <sup>3</sup> )
0,69

## LINING PACKING



L (cm)	H (cm)	P (cm)

## STOCKING



## TRANSPORT

